

# Millennium Series 2009

## Premium Wood Flooring Adhesive



Millennium Series 2009 is the ultimate engineered wood-flooring adhesive that can be used to install domestic species solids (i.e., oak, maple, hickory, ash etc.). It is formulated with a proprietary QUAD-POLYMERIC formula for installing all wood flooring widths and thickness. It can be used over a wide variety of sub-floors.

- LEED Compliant
- Advanced Engineered/Solids Wood Adhesive
- CHPS 01350 Compliant
- Outstanding Initial Grab
- Installer Friendly - Trowels Exceptionally Easy
- Low Odor
- California Compliant





# Millennium Series 2009



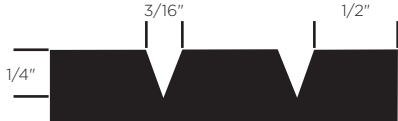
## Premium Wood Flooring Adhesive

### RECOMMENDED SUBSTRATES:

- Concrete
- Portland Based Underlayments
- Properly Prepared Gypsum
- APA Approved Plywood
- Terrazzo
- Fiber Cement Underlayment
- Radiant Heated Subfloors
- Properly Prepared VCT (Single Layer)
- Properly Prepared Sheet Vinyl (Single Layer, fully adhered)

### TECHNICAL DATA

Base Polymer	Proprietary Blend
Color	Tan
Solids	82-87%
VOC Content	<8 grams per liter
pH	8.6
Consistency	Thick Paste
Trowelability	Smooth
Shelf Life	One Year in Unopened Container
Storage	40°-95°F (4.4°-35°C)
Application	
Temperature	65°-95°F (18°-35°C)
Traffic Restrictions	Foot Traffic after 8 hours, Heavy Traffic after 24 hours
Open Time	Up to 45 minutes, depending on ambient conditions
Freeze/Thaw Stability	Up to 5 cycles at 10°F (-12°C)

FLOORING	TROWEL	ESTIMATED SPREAD RATE
Engineered plank up to 5" wide, 1/2" thick or solids 3/8" or thicker		50 sf/gallon
Engineered plank wider than 5" or thicker than 1/2"		40 sf/gallon
Thin Domestic Solids up to 3/8"		60 sf/gallon

parabond.com